



DPP15-100 Series

15-100W, 5-48V Output

DIN Rail Mount Power Supplies

- Low Cost
- 5V to 48V Outputs
- Universal Input
- Compact Size
- NEC Class 2 Compliant
- UL508 Listed
- -10°C to +71°C Operation
- RoHS Compliant

Key Market Segments & Applications

Industrial Controls:	Motor Control Systems
Factory Automation:	Process Control, Automotive, Chemical Processing
Test & Measurement:	Burn in & Test, Instrumentation Measurement

DPP15-100 Features and Benefits

Features

- PFC Compliant to EN61000-3-2
- UL508 Approvals
- TS35/7.5 or TS35/15 DIN Rail Mounting

Benefits

- Supports Global Use
- Easier System Configuration
- Easy System Integration

Specifications

ITEMS	MODELS	DPP15	DPP25/30	DPP50	DPP100
AC Input Voltage range (1)	VAC	85 - 264VAC			85 - 132VAC 176 - 264VAC
Input Frequency	Hz	47 - 63Hz			
Inrush Current (115 / 230VAC)	A	<35A	35 / 45A	35 / 50A	35 / 55A
Power Factor	-	Meets EN61000-3-2 Class A			
Max Input Current (230VAC)	A	0.4	0.72	0.7	1.2
Output Voltage Accuracy	%	±1% (24V outputs preset at 24.5V)			
Line Regulation	%	< 0.5%			
Load Regulation	%	< 0.5%			
Ripple/Noise	mV	<50mV (20MHz Bandwidth)			
Overcurrent Protection (Typ)	-	>120%			
Overvoltage Protection	V	125 - 137.5%			
Hold Up Time (115VAC input)	ms	> 20ms			
Parallel switch	-	No			Yes
LED Indicator	-	Green LED = On			
Operating Temperature	-	-10°C to +71°C (Derate linearly 5%/°C from 61°C to 71°C)			
Storage Temperature	-	-25°C to +85°C			
Operating Humidity	-	20 - 90% RH (non condensing)			
Cooling (2)	-	Convection			
Withstand Voltage	-	Input to Output 3kVAC for 1 min.			
Shock	-	Half sine wave, 4G, 22ms, 3 times per face, X, Y, Z			
Vibration	-	10-500Hz (20 min sweep) 0.002G ² /Hz, 1Grms acceleration X, Y, Z, 1 hour			
Isolation Resistance	Ω	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC			
Safety Agency Approvals	-	UL60950-1, UL508, UL1310 ⁽³⁾ (Class 2), EN60950-1, CE Mark			
Emissions	-	EN55011, EN55022 Class B Radiated & Conducted, EN61000-6-3			
Immunity	-	EN61000-6-2, EN61000-4-2 Level4, EN61000-4-3, EN61000-4-6 Level 3			
		EN61000-4-4 Level 4 (I/P) Level 3 (O/P), EN61000-4-5 Level 4, EN61000-4-8, EN61000-4-11			
Weight (Typ)	g	130	260	390	
Size (WxHxD)	mm	23 x 75 x 97	45 x 75 x 91	73 x 75 x 97	
Case material	-	Plastic			
MTBF (MIL-HDBK-217F, GF25)	Hours	287,000	>288,000	273,000	239,000
Warranty	yrs	3			

(1) Auto Select - DPP100 only

(2) Recommend 25mm clearance on all sides.

(3) Does not include DPP25-5 & DPP100-24 models. Evaluated to NEC NFPA70 Class 2 output per UL1310.

Model Selector

Model	Output Voltage (V)	Output Adjust (V)	Output Curr. (A)	Max. Output Power (W)	Efficiency at Full Load (%)
DPP25-5	5	5-6	5	25	78
DPP30-12	12	9.9-12.1	2.5	30	82
DPP50-15	15	11.9-15.1	3.4	50	85
DPP15-24	24	22.5-28.5	0.63	15	80
DPP30-24	24	22.5-28.5	1.3	30	84
DPP50-24	24	22.5-28.5	2.1	50	86
DPP100-24	24	22.5-28.5	4.2	100	87
DPP50-48	48	48-56	1.05	50	87

Installation


Snap-on Mounting - snap onto DIN Rail TS35/7.5 or TS35/15 (no tools required)

Cooling - Normal Convection


Clearance - 25mm all sides

Connection - Use copper wire 0.5-2.5mm² (AWG24-12)


Outline Drawing DPP15 Series

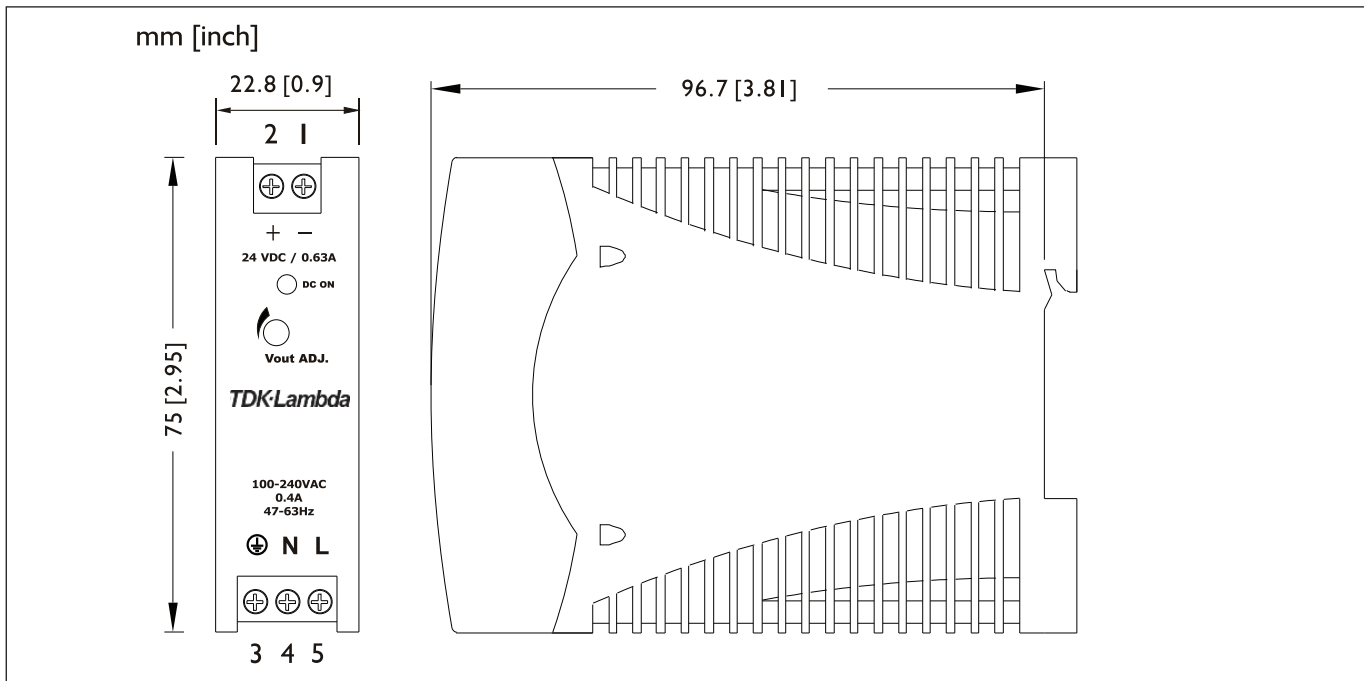

Outline Drawing DPP25-DPP50 Series

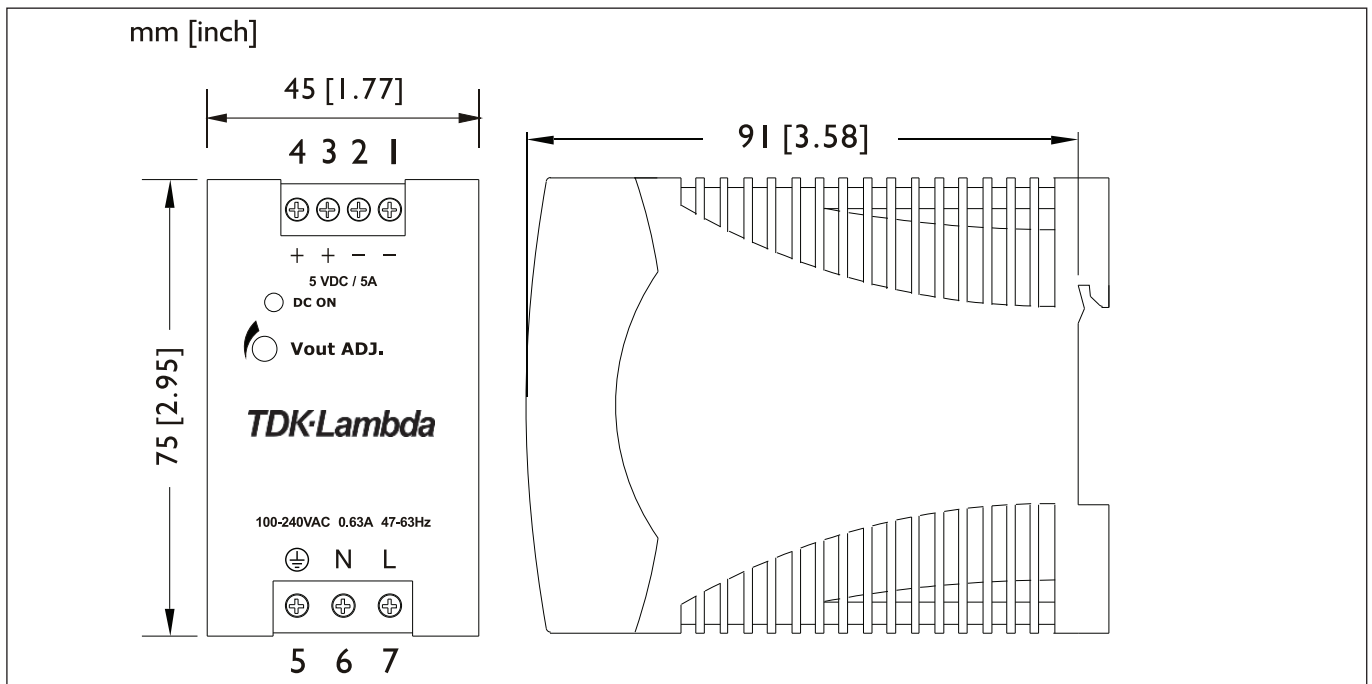

Outline Drawing DPP100 Series

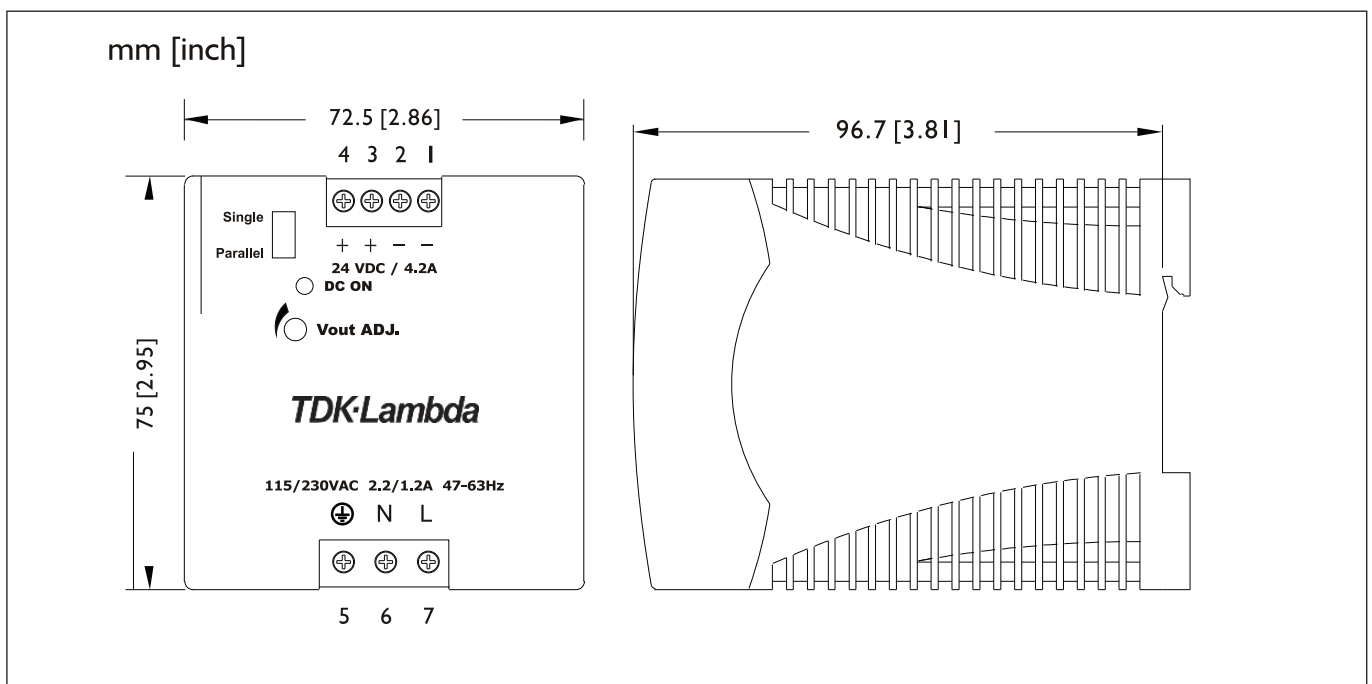



TDK-Lambda France SAS

ZAC des Delaches
CS 41077
9 rue Thuillere
91978 Villebon Courtaboeuf
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@tdk-lambda.nl
www.tdk-lambda.nl



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Scandinavia Sales Office

Valdemarsgade 7
4100 Ringsted
Denmark
Tel: +45 24 63 95 65
Fax: +45 69 80 44 99
info@de.tdk-lambda.com
www.emea.tdk-lambda.com



Switzerland Sales Office

Bahnhofstrasse 50
8305 Dietlikon
Switzerland
Tel: +41 44 850 53 53
Fax: +41 44 850 53 50
info@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.


Kibbutz
Givat Hashlosa 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



Russia

Technical Support:
St Petersburg
Tel: +7 (812) 6580463
Sales:
Moscow
info@tdk-lambda.ru
www.tdk-lambda.ru

Local Distribution



www.emea.tdk-lambda.com